

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



**Patent Office
Canberra**


I, JANENE PEISKER, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Complete specification in connection with Application No. 2003204904 for a patent by IAN ROBERT EDMONDS as filed on 25 June 2003.

I further certify that pursuant to the provisions of Section 38(1) of the Patents Act 1990 Application No. 2003204904 is associated with Provisional Application No. 2003901700 filed on 10 April 2003.

WITNESS my hand this
Tenth day of November 2003

A handwritten signature in black ink, appearing to read 'J. Peisker'.

JANENE PEISKER
TEAM LEADER EXAMINATION
SUPPORT AND SALES



LIGHT CHANNELLING WINDOW PANEL FOR SHADING AND ILLUMINATING
ROOMS.

BACKGROUND OF THE INVENTION

5

10

15

Glass windows are the conventional means for illuminating rooms with daylight. However, ordinary windows have some disadvantages in respect to natural illumination of rooms. One disadvantage is that daylight does not penetrate very deeply into rooms from ordinary windows. The illumination provided through ordinary windows tends to fall almost exponentially with distance from the window. A second disadvantage of ordinary windows is that direct sunlight entering through the windows will produce areas of very intense illumination in areas close to the window that give rise to thermal discomfort and reflected glare.

20

Thus, an objective of this invention is a method for producing a thin panel, suited for installation in a window, that channels or redirects all, or a very high proportion of, the sunlight incident from the sky onto the panel, into an upwards direction and over the ceiling of the room being illuminated by the window. This channelling or redirection of all incident sunlight into an upwards direction providing for complete shading from

incident sunlight of areas of the room in the vicinity of the window which would otherwise receive intense direct sunlight.

The light shelf is an effective and traditional means of reflecting light through a window deeper into a room and for shading areas near a window. However light shelves are an expensive architectural addition to a building and have a tendency to loose efficiency through the accumulation of dust. Therefore there have been many developments with the aim of providing the lighting and shading effect of a light shelf in a vertical panel form more suitable for installation in a window. Prismatic panels moulded from transparent material have been used for many years in windows to improve the natural illumination of buildings by refracting some light up toward the ceiling. A recent example is U.S. Pat. No. 4,557,565 to Ruck et al. However prismatic panels are deficient in refracting only a proportion of incident light upwards, in refracting the light through a relatively small angle and in dispersing the light which is refracted. The concept of deflecting light by total internal reflection at internal interfaces formed within a panel was invented by Wadsworth in 1903, U.S. Pat. No. 737,979. A method for producing such a panel by laser cutting is U.S. Pat. No. 4,989,952 to Edmonds in 1991. Such panels are effective in deflecting a fraction of incident light strongly upwards. However such panels are deficient in allowing a significant fraction of incident sunlight to pass through the panel thereby

producing reflected glare and thermal discomfort in work areas below the panel. When the internal interfaces in such panels are angled downwards into the room incident sunlight can be deflected at lower elevation angle much more deeply into a room.

5 However, as the elevation of incident sunlight decreases the elevation of the deflected light can become negative, that is downward, and sunlight deflected, near horizontally and downward, into a room presents an extremely serious glare problem to occupants.

10 Thus, a further objective of this invention is to provide a method for producing a thin transparent panel suited to installation in a window which channels all, or substantially all, incident sunlight into an upwards direction thereby
15 providing effective shading to work areas below the panel and eliminating the possibility of sunlight being deflected near horizontally into occupants eyes.

Bartenbach et al U.S. Patent 4,699,467 describes a reflective
20 light port formed from upper and lower metallic reflectors. A plurality of such ports arranged one above the other may be installed in a window to reflect sunlight into a room. The method of producing a light port of Bartenbach is deficient in that it is difficult and expensive to produce an array of
25 complex metal reflectors fixed one above the other in a panel at the scale (10 mm thick) suited to installation in a window.

Secondly the light ports of Bartenbach are deficient in requiring installation between two transparent panels to prevent accumulation of dust on the reflective surfaces.

5 Thus it is a further objective of this invention is to provide a method for producing a light-channelling panel, the reflecting surfaces of which do not accumulate dust.

10 Cowling, US Patent 5,295,051 (1994), describes a light channel formed from an element of transparent material with an upper and lower reflective surface. Each element being formed by extrusion or moulding with an array of such light channelling elements to be fixed one above the other to form a thin panel for illuminating rooms.

15 The method of producing a light-channelling panel of Cowling is deficient in that, at the scale necessary to form a thin (10 mm) panel suited to installation in a window, each light channelling element is about 2 mm high and several hundred must be fixed one
20 above the other to form a practical sized panel (about 0.5 m high). Fixing several hundred small elements together is manually intensive or requires the development of specialised machinery. Alternatively, if a panel containing several hundred precisely shaped elements is to be formed in one piece by
25 extrusion the die and infrastructure for extrusion are both highly specialised and expensive. By the method of Cowling it is

difficult and expensive to make any variation in the design of a light-channelling panel.

Thus it is a further objective of this invention to provide a method for producing a thin, large area light channelling panel from readily available and inexpensive sheets of clear acrylic plastic by a relatively inexpensive and flexible method suited to the production of small and large quantities of panel with the capability of quickly varying the light channel design so as to suit different applications e.g high or low latitude locations, East or South facing windows.

SUMMARY OF THE INVENTION

The present invention provides a method to produce light channels within the body of a transparent panel by making a series of parallel laser cuts through both sides of a single sheet of clear acrylic plastic so as to form an array of light channels in the single sheet. In another embodiment the present invention provides a method for producing light channels within a panel by making cuts through one side of a first sheet of transparent acrylic plastic and through one side of a second sheet then transposing the second sheet relative to the first sheet and fixing the face of the transposed second sheet against the face of the first sheet thereby forming a combined panel containing an array of light channels. The light channels so

formed channel light from the input face of the panel to the output face of the panel by a combination of refraction at the input and output faces and by total internal reflection at the dielectric to air interfaces formed by the laser cuts.

5

When installed in the upper part of a window to a room the light channelling panel of this invention channels all sunlight incident on the panel, through the panel, and over the ceiling deep inside the room thereby illuminating, by diffuse reflection from the ceiling, the deep interior of the room while effectively shading areas near the window from intense sunlight.

10

Embodiments of the invention will now be described with reference to the accompanying drawings.

15

BRIEF DESCRIPTION OF THE DRAWINGS.

FIG. 1 is a sectional view of a transparent solid sheet of acrylic plastic with laser cuts made right through the sheet at a small angle to the normal to the sheet.

20

FIG. 2 is a sectional view of a transparent solid sheet of acrylic plastic with laser cuts made partly through the sheet at a small angle to the normal to the sheet.

25

FIG. 3 is a sectional view of a first sheet with angled laser cuts right through and a second sheet with similarly spaced angled laser cuts right through. The second sheet having being transposed and fixed in contact with the first sheet to produce light channels within the resulting panel.

FIG. 4 is a sectional view of a first sheet with angled laser cuts partly through and a second sheet with similarly spaced angled laser cuts partly through. The second sheet having being transposed and fixed in contact with the first sheet to produce light channels within the resulting panel.

FIG. 4a is a schematic view of a first sheet with angled laser cuts partly through and a second sheet with similarly spaced angled laser cuts partly through. The second sheet having being transposed and fixed in contact with the first sheet to produce light channels within the resulting panel. For illustrative purposes this drawing shows the two sheets slightly separated.

FIG. 5 is a sectional view of a transparent sheet of acrylic plastic with angled laser cuts made partly through the first face of the sheet.

FIG. 6 is a sectional view of a transparent sheet of acrylic plastic with equally spaced angled laser cuts made through both

faces of the sheet such that the laser cuts just meet thereby forming light channels within a transparent panel.

FIG. 7 is a schematic view of a light channelling panel showing the solid continuous border and solid narrow internal column that must be left to support the cut regions when laser cuts extend right through the panel.

FIG. 8 is a sectional view of a light channelling panel illustrating the channelling of high elevation light through the panel.

FIG. 9 is a sectional view of a light channelling panel illustrating the wide angular range of elevation in which all incident light is channelled through the panel into an upwardly directed output.

FIG. 10 is a sectional view of a building showing the usual disposition of a light channelling panel in the window, the channelling of sunlight to the ceiling at the rear of the room and the shading of work surfaces near the window. It also illustrates the provision of an undistorted view through the panel in directions near horizontal.

DETAILED DESCRIPTION OF THE INVENTION

A first preferred method of producing a light channelling panel of this invention is as follows:

5 (1) By use of a laser cutting machine make a parallel array of thin laser cuts 1 through, or partly through, a first sheet of transparent acrylic plastic 2, the cuts 1 to be made through, or partly through the sheet 2 at a specified spacings and at a constant small angle from the normal to the sheet 2 so as to produce an array of laser cuts 1 in the sheet as shown in section in Fig 1 for cuts right through the panel and as shown in section in Fig 2 for cuts partly through the panel. When the laser cuts 1 extend right through the sheet 2 as in Fig 1
10 borders and thin internal regions or columns in the sheet are left uncut and solid to support the cut regions, (see Fig. 7).

(2) Make a parallel array of thin laser cuts 3 through, or partly through, a second sheet of transparent acrylic plastic 4 with a laser cutting machine, the cuts 3 to be made through, or partly through the sheet 4 at the same specified spacings as the cuts 1 made in said first sheet 2 and at a constant small angle from the normal to the sheet so as to produce an array of laser cuts 3 in the sheet 4 as shown in section in Fig 3 for cuts
20 right through the sheet and as shown in section in Fig 4 for cuts partly through the sheet. The constant small angle from the

normal of the cuts 3 made in the second sheet 4 may be equal to or different from the small angle from the normal of the cuts 1 in the first sheet 2.

5 (3) Transpose (that is, rotate through 180° , or flip), said second sheet 4 and fix the surface of the transposed second sheet 4 in contact with the surface of said first sheet 2 such that the edge of the cuts 3 in said second sheet are collinear with edge of the cuts 1 in said first sheet so as to form a
10 combined panel 5 containing an array of light channels 6 as illustrated in Fig 3 for cuts right through the panels and in Fig 4 for cuts partly through the panel.

The light channelling panel of Fig 4 is shown in a schematic
15 view in Fig 4 a. Sheet 2 with laser cuts 1 and transposed sheet 4 with laser cuts 3 would, in practice, be fixed together with the surfaces of each sheet in contact. However, in Fig 4a, the sheets 2 and 4 are shown with slight separation for the purposes of clarity of illustration. Two light rays traced through the
20 panel illustrate how the light channels formed between laser cuts 1 and laser cuts 3 form a light channel 6 that channels light by total internal reflection from the input face of the panel through to the output face.

25 A second preferred method of producing a light channelling panel of this invention is as follows:

(1) Make a parallel array of thin laser cuts 1 partly through the first face 7 of a sheet of transparent acrylic plastic 8 with a laser cutting machine, the cuts 1 to be partly through the sheet at a specified spacing and at a constant small angle from the normal to the sheet so as to produce an array of laser cuts 1 in the sheet as shown in section in Fig 5.

(2) Transpose, (that is, rotate through 180° or flip), said sheet of transparent acrylic plastic 8 and by use of the laser cutting machine make a second parallel array of thin laser cuts 3 partly through the second face 9 of said sheet of transparent acrylic plastic 8 with the laser cutting machine, the cuts 3 to be made at the same specified spacing as the cuts 1 made in the first face 7 and at the same or a different constant small angle from the normal to the panel so as to produce an array of laser cuts 3 through the second face which just meet the bottom of the laser cuts 1 made through the first face 7 so as to produce a light channelling panel containing an array of light channels 6 as illustrated in Fig 6 suited for the channelling of light from said first surface 7 through to said second face 9 . As the laser cuts 1 and 3 meet in the middle of the sheet 8 it is necessary to leave a border 10 and thin internal regions 11 uncut and solid to support the cut regions as illustrated schematically in Fig 7.

As illustrated in Fig 8 a typical configuration for a light channelling panel of this invention when fixed in vertical orientation in a window opening to a room will channel all, or substantially all, sunlight incident on the first face of said panel by the process of refraction and total internal reflection through to the second face of said panel so that the light emerging from said second face is directed upward into the room. The typical practical dimensions of the light channelling panel illustrated in Fig 8 would be: overall panel width 12 mm, laser cut spacing 4 mm, laser cuts meeting at a depth of 6 mm in the panel, angle of laser cuts on the input side 60° to the normal and angle of laser cuts on the output side 120° to the normal to the panel. While these are typical dimensions of a practical light channelling panel variations of these dimensions fall within the scope of the invention and are to be considered part thereof.

To illustrate the illuminating and shading performance of the light channelling panel in more detail additional ray tracings through this typical example of the light channelling panel of this invention are shown in Fig 9. The upper set of incident rays, ray group 12 in Fig 9 show that high angle incident light is channelled through the panel and into a group of rays directed upward at low elevation. The second group of traced rays, ray group 13, show that the minimum elevation angle at which all incident light is channelled into an upward direction

is 18° for this particular configuration of light channelling panel. For light incident at angles below 18°, ray group 14, some of the incident light passes directly through the panel thereby providing for an undistorted view through the panel in this direction but at reduced brightness. A fairly large proportion of light incident horizontally, ray group 15, passes directly through the panel. It is possible, within the scope of this invention, to alter the principal parameters of the light channelling panel, the cut spacing, the cut depth and the cut angle, to optimise desired performance characteristics. For example, maximising light penetration to the rear of the room by increasing the cut angle of the laser cuts through the input face, or, increasing the shading effect of the panel to include shading of lower angle light by decreasing the laser cut spacing.

Fig. 10 illustrates the usual positioning of the light-channelling panel of this invention in the window of a room. The panel is usually installed inside the window and in the upper part of the window. As shown, incident light, ray 16, passes through window 17 and is channelled through panel 5 into the direction of ray 18 that penetrates upward and over the ceiling 19 deep in the interior of the room. From the ceiling 19 the light is diffusely reflected into rays 20 to provide illumination to work surfaces 21 deep inside the room. Light rays 22 which would otherwise have intensely illuminated work

surfaces 23 close to the window are entirely redirected by the light channelling panel to the ceiling towards the rear of the room. Usually the light channelling panel 5 is installed in the window above eye level of occupants 24 in the room to avoid the possibility of sunlight being directed upwards into occupants view. Occupants 24 generally have a relatively undistorted view to the outside, ray 25, through the light channelling panel provided the viewing direction is near horizontal.

The energy conservation advantages of the light-channelling panel of this invention are considerable. All sunlight incident on the panel is channelled through to the room. However the light channels redirect all sunlight away from the floor and towards the ceiling from where it may be utilised to provide useful illumination in the room. Consider a panel similar to the designs in Fig 1 through Fig 9. The panel is 2 m wide and 0.5 m high installed in the upper part of a window as in Fig. 10. If sunlight of intensity 1000 W/m^2 is incident at 60° elevation on the panel the radiant energy channelled through the panel is $2 \times 0.5 \times 1000 \times \cos 60^\circ = 500 \text{ W}$. Ignoring reflection loss, all of this radiant energy is channelled into an upward elevation of about 30° and over the ceiling deep in the room. Ignoring reflection loss at the ceiling all of this energy is diffusely reflected downwards to provide useful illumination deep in the room. As the efficacy of sunlight is 105 lumens/W this energy is equivalent to $500 \times 105 = 52,500 \text{ lumens}$ of

illumination. The efficacy of a fluorescent lamp is about 70 lumens/W and a 36 W fluorescent tube provides $36 \times 70 = 2520$ lumens of illumination. It follows that the 1 square metre of light channelling panel in the window provides the equivalent of $52500/2520 = 21$ fluorescent lights in the room. If the light channelling panel were not present this 500 W of radiant energy would be largely absorbed on the floor and converted to heat. In overcast conditions the useful illumination provided by the panel is reduced to about 1/10 of the value calculated above for direct sunlight.

Those modifications and equivalents which fall within the spirit of the invention are to be considered a part thereof.

I claim:

1. A light channelling panel produced by:

5 (a), cutting a parallel array of laser cuts through, or partly through, a first sheet of transparent acrylic plastic with a laser cutting machine, the laser cuts being made with specified spacings between the parallel cuts and at a constant angle from the normal to said first sheet and, in the case where the cuts
10 are made partly through said first sheet, with borders around the periphery of the sheet and thin internal columns perpendicular to the laser cuts left uncut in the sheet to support the cut regions in said first sheet;

15 (b), cutting a parallel array of laser cuts through, or partly through, a second sheet of transparent acrylic plastic with a laser cutting machine, the laser cuts through, or partly through, said second sheet being made at the same specified spacings between the parallel cuts as for the first sheet and at
20 a constant angle from the normal to said second sheet and, in the case where the cuts are made partly through said second sheet, with borders around the periphery of said second sheet and thin internal columns perpendicular to the laser cuts left uncut in the sheet to support the cut regions in said second
25 sheet;

(c), transposing, (that is, rotating through 180° or flipping about an axis perpendicular to the line of the laser cuts), said second sheet and fixing the face of said transposed second sheet in contact with the face of said first sheet such that the edge of the cuts in said transposed second sheet are collinear with the edge of the cuts in said first sheet so as to form a light channelling panel containing an array of light channels that channels light, by total internal reflection at the laser cuts, from a first (input) face of said light channelling panel, through to the second (output) face of said light channelling panel.

2. A light channelling panel produced by:

(a); cutting a parallel array of laser cuts through the first face of a sheet of transparent acrylic plastic with a laser cutting machine, the laser cuts being made at specified spacings between the parallel cuts and at a constant angle from the normal to said sheet, said laser cuts extending partly through said sheet;





(b), transposing, (that is, rotating through 180° or flipping about an axis perpendicular to the line of the laser cuts), said sheet of transparent acrylic plastic and, by use of the laser cutting machine, cutting a second parallel array of laser cuts through the second face of said sheet at the same specified

spacings as the cuts made through said first face and at the same, or a different angle, from the normal to said sheet, said laser cuts through said second face extending partly through said sheet to just meet the internal or bottom edge of the laser cuts made through said first face, with borders around the periphery of the sheet and thin internal columns perpendicular to the laser cuts left uncut to support the cut regions of said sheet, the cuts through said first face and the cuts through said second face meeting within said sheet so as to form a light channelling panel containing an array of light channels that channels light, by total internal reflection at the laser cuts, from a first (input) face of said light channelling panel, through to the second (output) face of said light channelling panel.

3. A light channelling panel as in claim 1 or as in claim 2 fixed in vertical orientation in a window opening to a building to channel all, or substantially all, of the sunlight incident on the first face of the panel through to the second face of the panel and upward, into the building, so as to illuminate the building with sunlight reflected diffusely from the ceiling onto work surfaces in the building.

ABSTRACT.

A method for producing a light channelling panel by making an array of angled laser cuts in a first acrylic sheet, making a similarly spaced array of angled cuts in a second acrylic sheet, transposing or flipping the second sheet and fixing it in contact with the first sheet to form a panel with an array of internal light channels. Alternatively, by making an array of angled laser cuts in the surface of an acrylic sheet and an array of similarly spaced angled cuts in the opposite surface of the acrylic sheet to form a panel with an array of internal light channels. Said light channelling panel when positioned in a window of a building channels all sunlight incident on the panel through the panel and over the ceiling in the building thereby illuminating the building with daylight and shading work areas near the window.

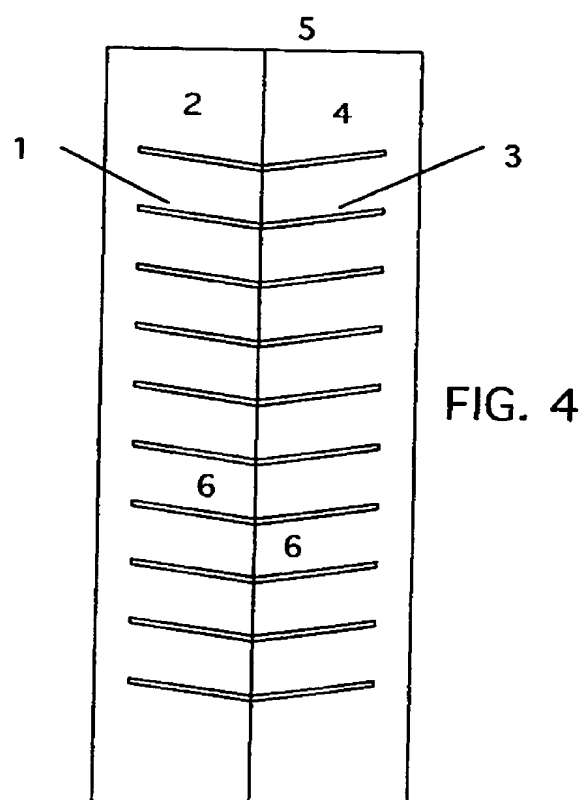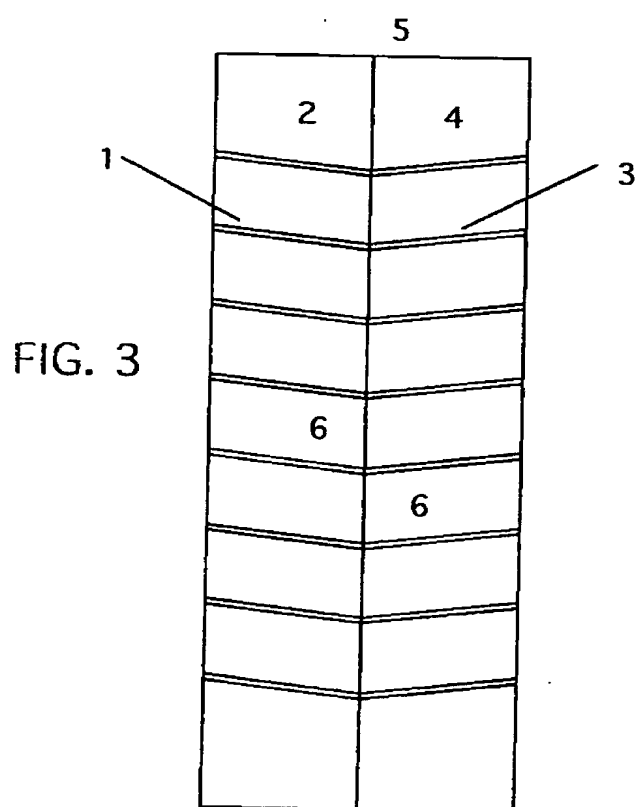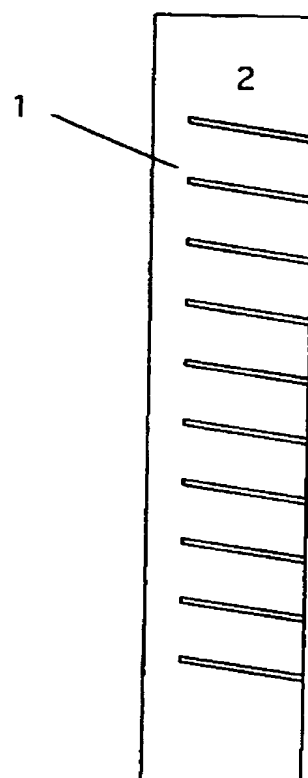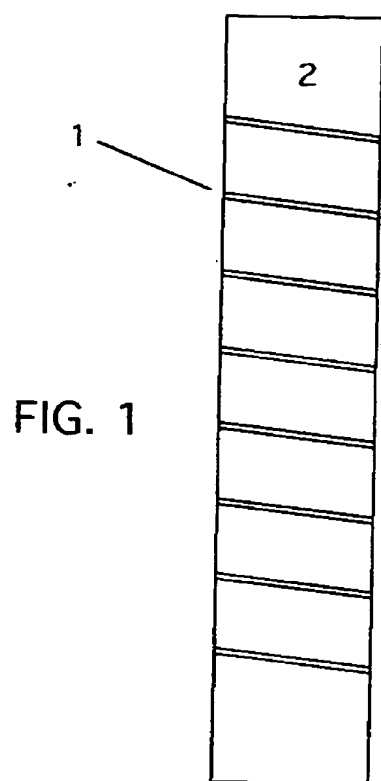

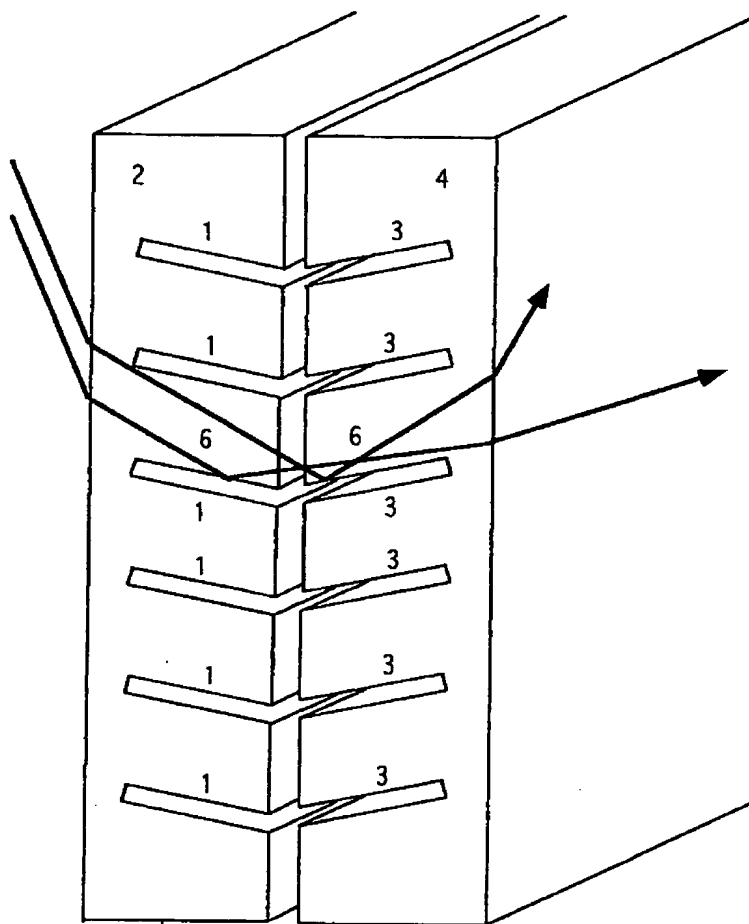


FIG. 4a

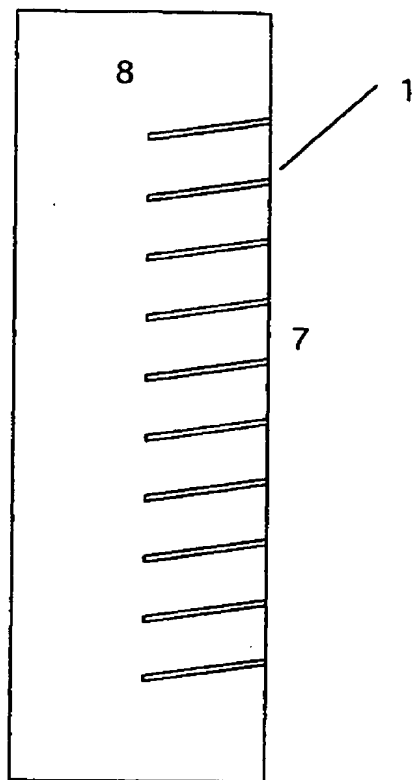


FIG. 5.

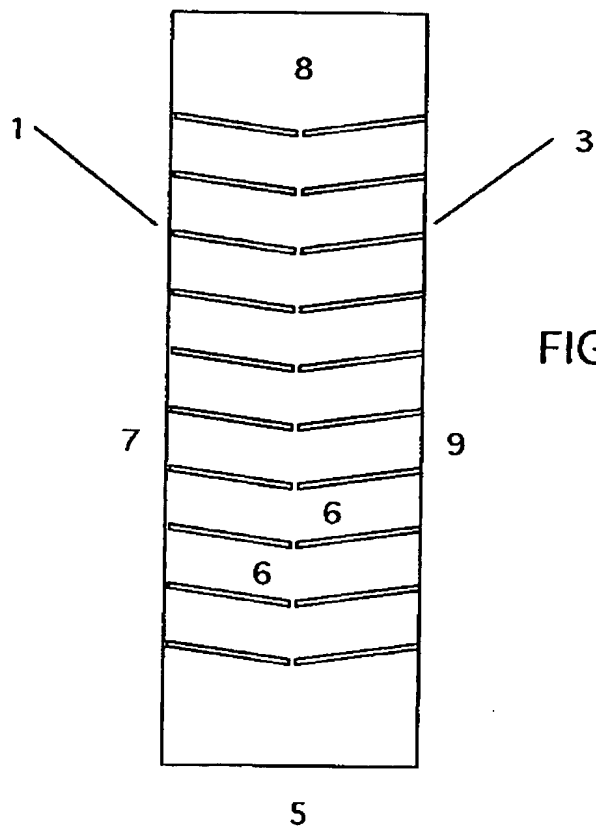


FIG. 6

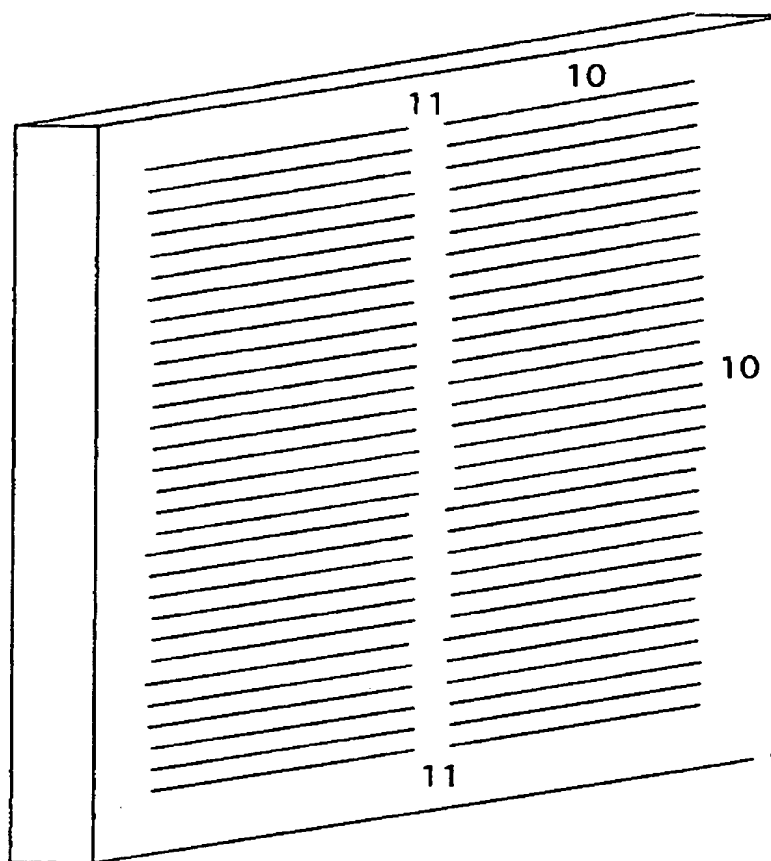


FIG. 7

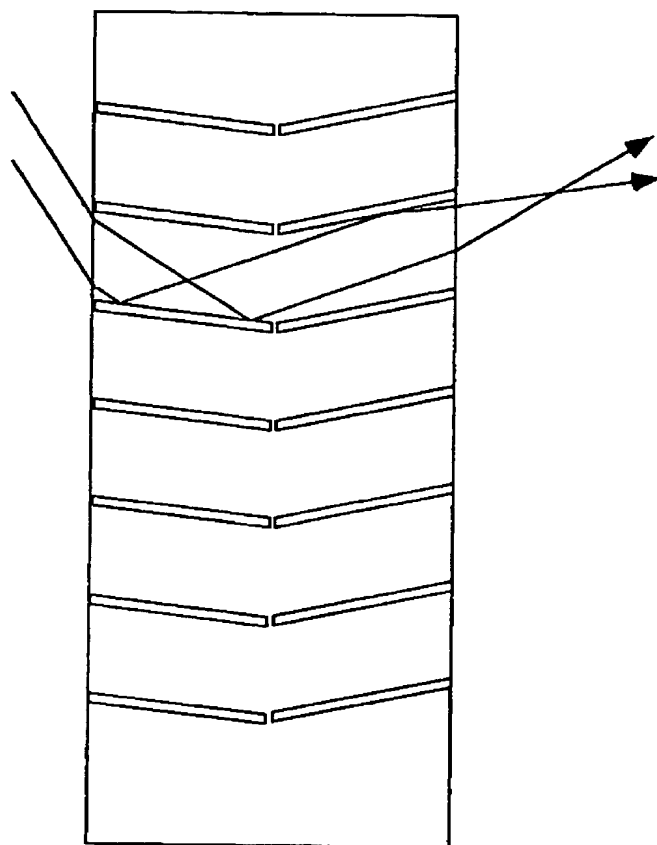


FIG. 8

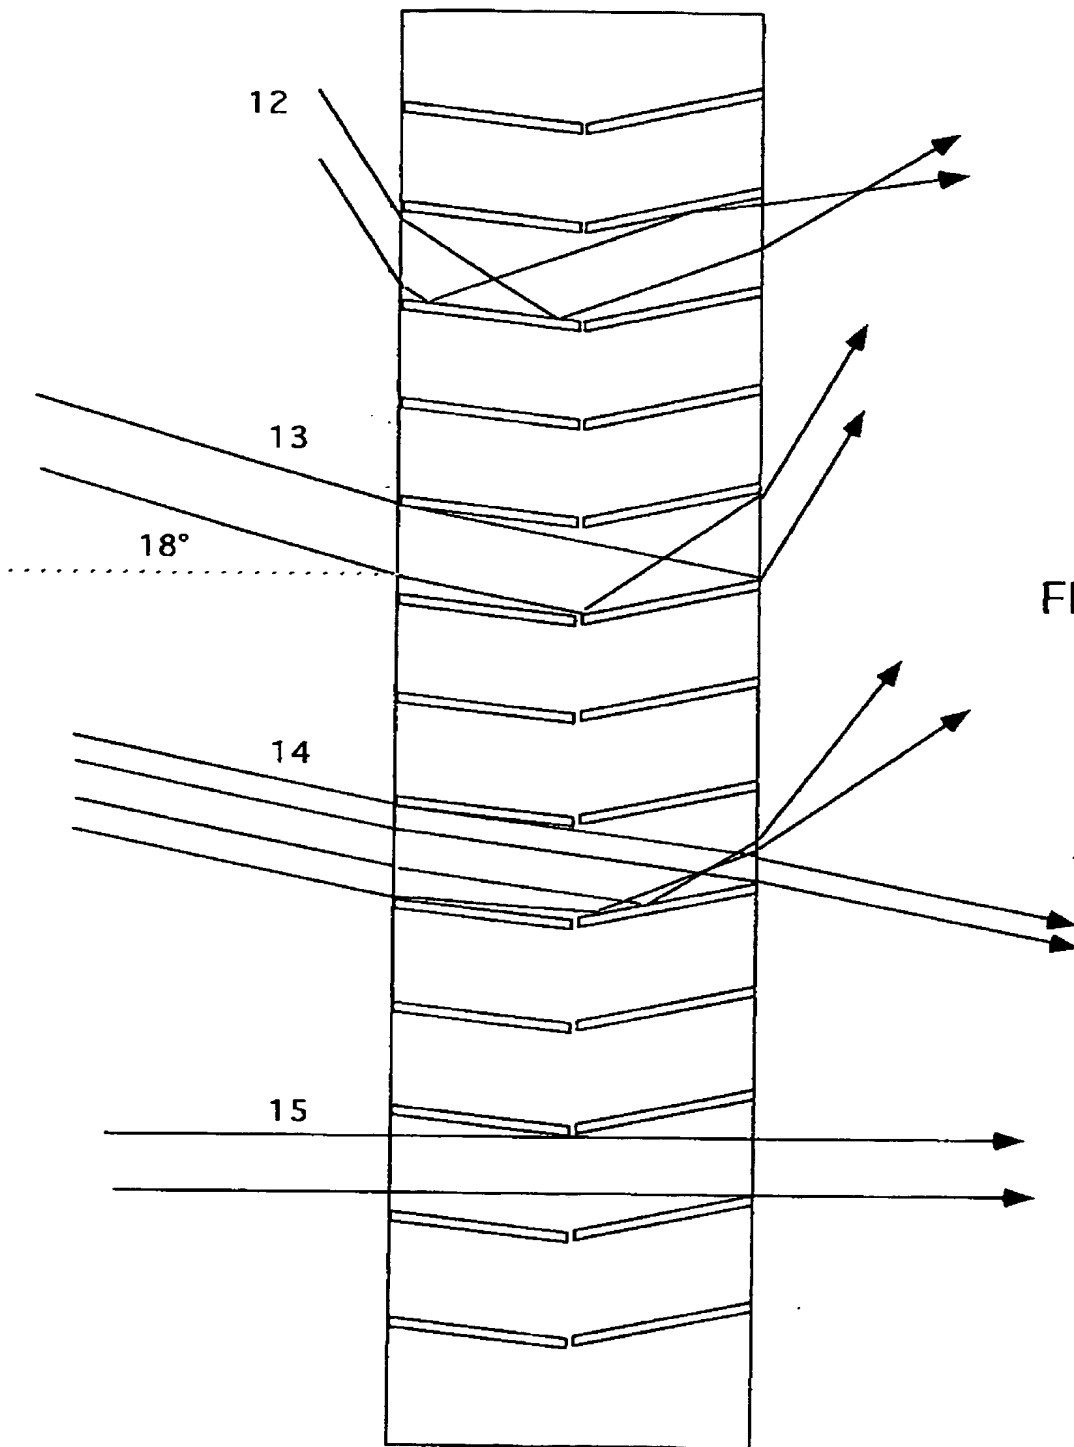


FIG. 9

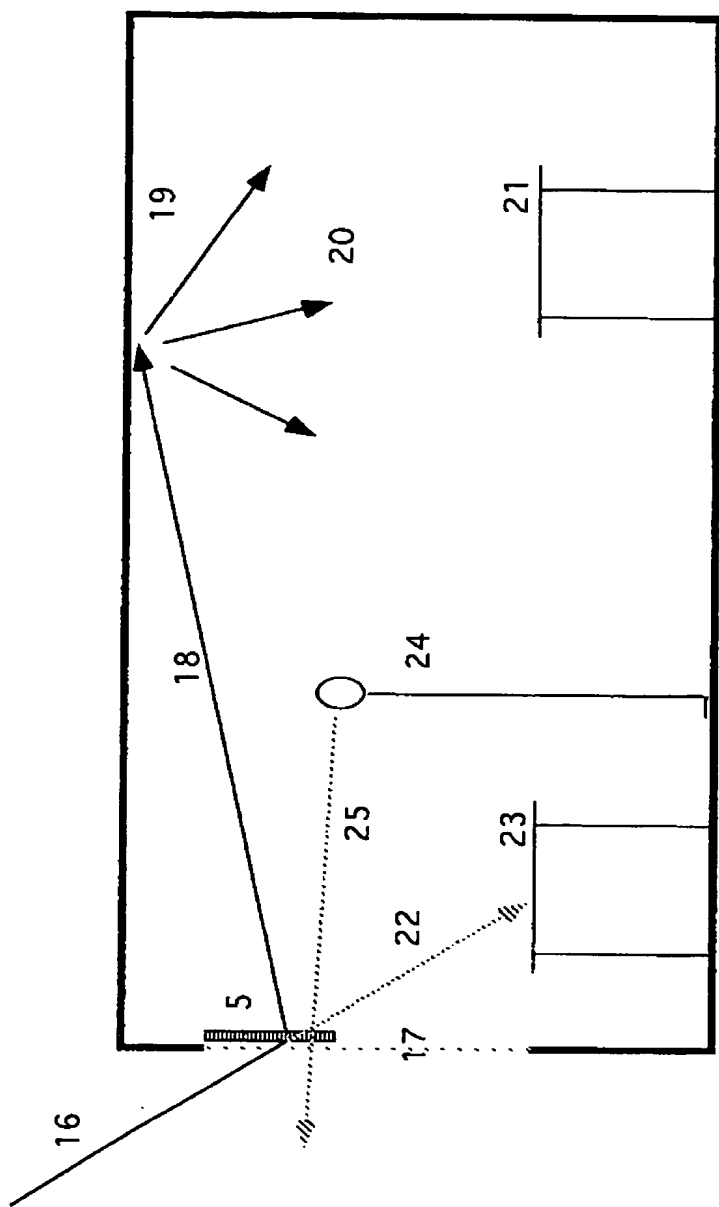


FIG. 10